




1500-WATT SURFACE MOUNT TRANSIENT VOLTAGE – 6.8V ~ 440V

DESCRIPTION:

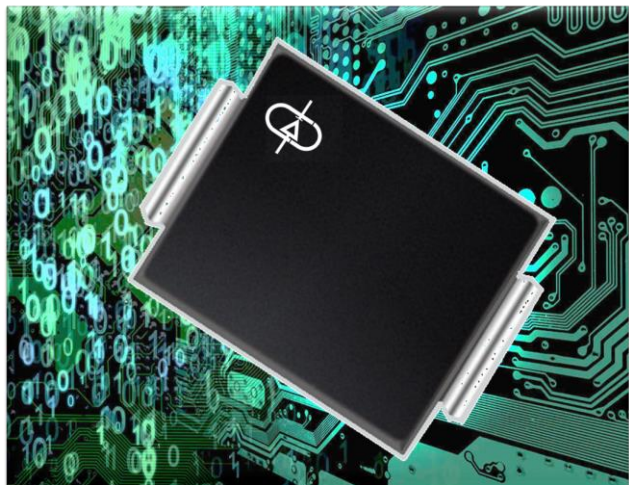

The ALPP15SMCJXXA/CA (UNI/BI) Series are designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

The ALPP15SMCJXXA/CA Series has a peak pulse power rating of 1500 Watts for an 10/1000 μ s waveshape.

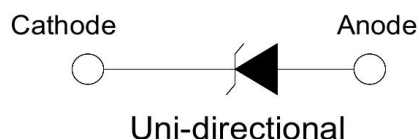

FEATURES:

- 1500W peak pulse power capacity with a 10/1000 μ s waveform, repetition rate (duty cycle): 0.01%
- Excellent clamping capability.
- Low incremental surge resistance.
- Fast response time from 0V to VBR, typically less than 1 ps for uni-directional & 5 ns for bi-directional types.
- Glass passivated chip junction in DO-214AB(SMC) package.
- Lead-free parts meet RoHS requirements.
- Suffix “-H” indicates Halogen-free part, ex. ALPP15SMCJ6.8A-H.

APPLICATIONS:

- TVS components are ideal for the protection of I/O Interfaces, VCC bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.

MECHANICAL CHARACTERISTICS

- Epoxy: UL94-V0 rated flame retardant.
- Case: Molded plastic, DO-214AB / SMC-F.
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode except bi-directional models
- Mounting Position: Any.
- Approximate Weight: 0.23 grams.

TYPICAL DEVICE CHARACTERISTICS

MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Operating Junction Temperature range	T_J	-65 to +150	$^\circ\text{C}$
Storage Temperature range	T_{STG}	-65 to 150	$^\circ\text{C}$
Typical Thermal Resistance – Junction to Case	$R_{\theta JC}$	15	$^\circ\text{C} / \text{W}$
Typical Thermal Resistance – Junction to Ambient	$R_{\theta JA}$	75	$^\circ\text{C} / \text{W}$
Maximum instantaneous forward voltage at 100A for uni-directional types only, Note 4	V_F	3.5/5.0	V
Peak Pulse Power Dissipation with 10/1000 μs waveform, (Fig.1) (Note 1, 2)	P_{PPM}	1500	W
Peak Pulse current with a 10/1000 μs Waveform	I_{PPM}	See Table 1	A
Steady State Power Dissipation at $T_A=50^\circ\text{C}$, Note 2	$P_{M(AV)}$	6.5	W
Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3)	I_{FSM}	200	A

Notes:

1. Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 2.
2. Mounted on copper pad area of 0.31"x0.31" (8.0x8.0mm) to each terminal.
3. Measured on 8.3ms single half sine wave or equivalent square wave, duty cycle=4 pulses per minute maximum.
4. $V_F < 3.5\text{V}$ for devices of $V_{BR} < 200\text{V}$ and $V_F < 5.0\text{V}$ for devices of $V_{BR} > 201\text{V}$.

TYPICAL ELECTRICAL CHARACTERISTICS

ELECTRICAL CHARACTERISTICS PER LINE @ T _A = 25°C Unless Otherwise Specified							
PART NUMBER (Notes 1-2)	REVERSE STAND-OFF VOLTAGE V _{RWM} VOLTS	BREAKDOWN VOLTAGE V _(BR) @ I _T VOLTS		TEST CURRENT @ I _T mA	MAXIMUM CLAMPING VOLTAGE @ I _{PP}		MAXIMUM REVERSE LEAKAGE CURRENT @ V _{RWM} I _R μA
		MIN	MAX		V _C VOLTS	@ I _{PP} AMPS	
ALPP15SMCJ6.8A / CA	5.8	6.45	7.14	10.0	10.5	144.8	1000
ALPP15SMCJ7.5A / CA	6.4	7.13	7.88	10.0	11.3	134.5	500
ALPP15SMCJ8.2A / CA	7.02	7.79	8.61	10.0	12.1	125.6	200
ALPP15SMCJ9.1A / CA	7.78	8.65	9.50	1.0	13.4	113.4	50
ALPP15SMCJ10A / CA	8.55	9.50	10.5	1.0	14.5	104.8	10
ALPP15SMCJ11A / CA	9.4	10.5	11.6	1.0	15.6	97.4	5
ALPP15SMCJ12A / CA	10.2	11.4	12.6	1.0	16.7	91.0	5
ALPP15SMCJ13A / CA	11.1	12.4	13.7	1.0	18.2	83.5	1
ALPP15SMCJ15A / CA	12.8	14.3	15.8	1.0	21.2	71.7	1
ALPP15SMCJ16A / CA	13.6	15.2	16.8	1.0	22.5	67.6	1
ALPP15SMCJ18A / CA	15.3	17.1	18.9	1.0	25.2	60.3	1
ALPP15SMCJ20A / CA	17.1	19.0	21.0	1.0	27.7	54.9	1
ALPP15SMCJ22A / CA	18.8	20.9	23.1	1.0	30.6	49.7	1
ALPP15SMCJ24A / CA	20.5	22.8	25.2	1.0	33.2	45.8	1
ALPP15SMCJ27A / CA	23.1	25.7	28.4	1.0	37.5	40.5	1
ALPP15SMCJ30A / CA	25.6	28.5	31.5	1.0	41.4	36.7	1
ALPP15SMCJ33A / CA	28.2	31.4	34.7	1.0	45.7	33.3	1
ALPP15SMCJ36A / CA	30.8	34.2	37.8	1.0	49.9	30.5	1
ALPP15SMCJ39A / CA	33.3	37.1	41.0	1.0	53.9	28.2	1
ALPP15SMCJ43A / CA	36.8	40.9	45.2	1.0	59.3	25.6	1
ALPP15SMCJ47A / CA	40.2	44.7	49.4	1.0	64.8	23.5	1
ALPP15SMCJ51A / CA	43.6	48.5	53.6	1.0	70.1	21.7	1
ALPP15SMCJ56A / CA	47.8	53.2	58.8	1.0	77.0	19.7	1
ALPP15SMCJ62A / CA	53.0	58.9	65.1	1.0	85.0	17.9	1
ALPP15SMCJ68A / CA	58.1	64.6	71.4	1.0	92.0	16.5	1

PART NUMBER (Notes 1-2)	REVERSE STAND-OFF VOLTAGE V_{RWM} VOLTS	BREAKDOWN VOLTAGE $V_{(BR)}$ @ I_T VOLTS		TEST CURRENT @ I_T mA	MAXIMUM CLAMPING VOLTAGE @ I_{PP}		MAXIMUM REVERSE LEAKAGE CURRENT @ V_{RWM} I_R μA
		MIN	MAX		V_C VOLTS	@ I_{PP} AMPS	
ALPP15SMCJ75A / CA	64.1	71.3	78.8	1.0	103.0	14.8	1
ALPP15SMCJ82A / CA	70.1	77.9	86.1	1.0	113.0	13.5	1
ALPP15SMCJ91A / CA	77.8	86.5	95.5	1.0	125.0	12.2	1
ALPP15SMCJ100A / CA	88.5	95.0	105.0	1.0	137.0	11.1	1
ALPP15SMCJ110A / CA	94.0	105.0	116.0	1.0	152.0	10.0	1
ALPP15SMCJ120A / CA	102.0	114.0	126.0	1.0	165.0	9.2	1
ALPP15SMCJ130A / CA	111.0	124.0	137.0	1.0	179.0	8.5	1
ALPP15SMCJ150A / CA	128.0	143.0	158.0	1.0	207.0	7.3	1
ALPP15SMCJ160A / CA	136.0	152.0	168.0	1.0	219.0	6.9	1
ALPP15SMCJ170A / CA	145.0	162.0	179.0	1.0	234.0	6.5	1
ALPP15SMCJ180A / CA	154.0	171.0	189.0	1.0	246.0	6.2	1
ALPP15SMCJ200A / CA	171.0	190.0	210.0	1.0	274.0	5.5	1
ALPP15SMCJ220A / CA	185.0	209.0	231.0	1.0	328.0	4.6	1
ALPP15SMCJ250A / CA	214.0	237.0	263.0	1.0	344.0	4.4	1
ALPP15SMCJ300A / CA	256.0	285.0	315.0	1.0	414.0	3.7	1
ALPP15SMCJ350A / CA	300.0	332.0	368.0	1.0	482.0	3.2	1
ALPP15SMCJ400A / CA	342.0	380.0	420.0	1.0	548.0	2.8	1
ALPP15SMCJ440A / CA	376.0	418.0	462.0	1.0	602.0	2.5	1
ALPP15SMCJ480A / CA	408.0	456.0	504.0	1.0	658.0	2.3	1
ALPP15SMCJ510A / CA	434.0	485.0	535.0	1.0	698.0	2.1	1
ALPP15SMCJ530A / CA	477.0	503.5	556.5	1.0	725.0	2.1	1
ALPP15SMCJ540A / CA	486.0	513.0	567.0	1.0	740.0	2.0	1
ALPP15SMCJ550A / CA	495.0	522.5	577.5	1.0	760.0	2.0	1

NOTE:

1. V_{BR} measured after I_T applied for 300us, I_T =square wave pulse or equivalent.
2. Suffix 'C' denotes bi-directional devices. Suffix 'A' denotes 5% tolerance devices, no suffix denotes 10% tolerance devices.
3. Part numbers with "CA" suffix are bidirectional devices, i.e., ALPP15SMCJ550CA
4. For bidirectional type having V_{RWM} of 10 volts and less, the I_R limit is double.
5. The available parts are "A" type only, the parts without A (V_{BR} is $\pm 10\%$) is not available
6. All term and symbols are consistent with ANS/IEEE C62.35

TYPICAL DEVICE CHARACTERISTICS CURVES

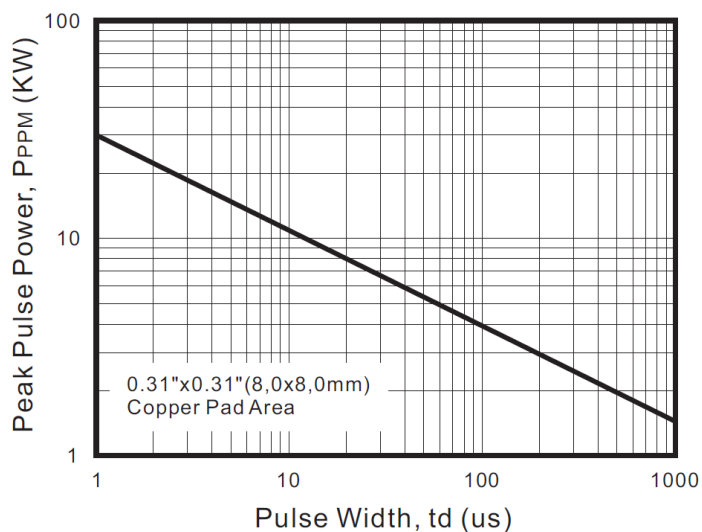


Fig1. PEAK PULSE POWER RATING CURVE

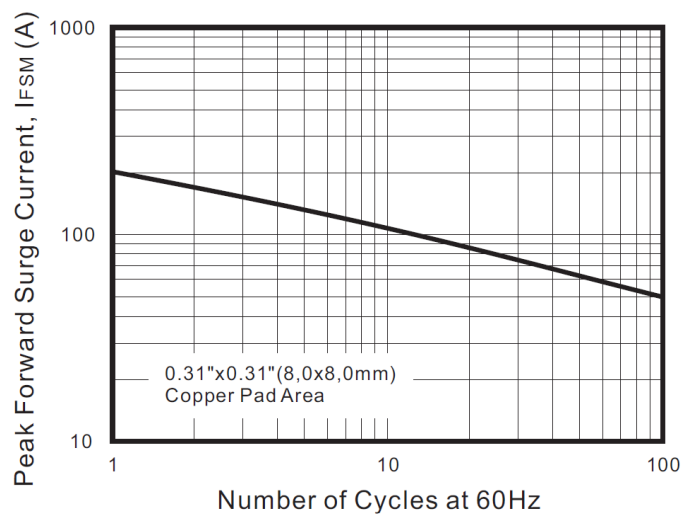


Fig2. MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

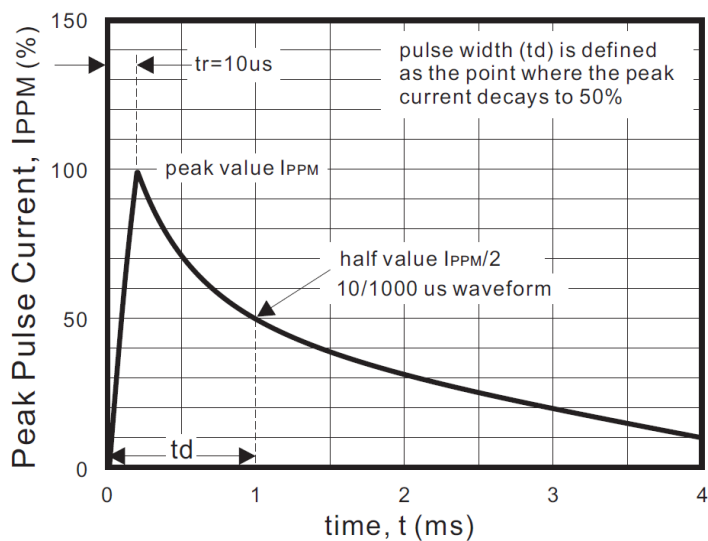


Fig3. PULSE WAVEFORM

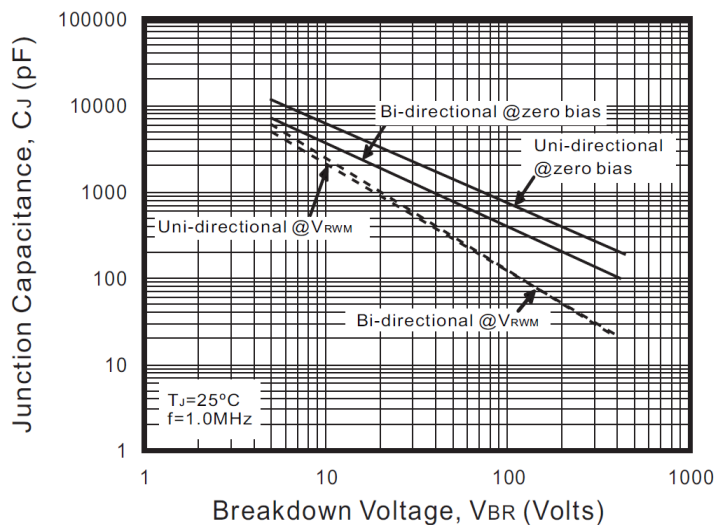


Fig4. TYPICAL JUNCTION CAPACITANCE

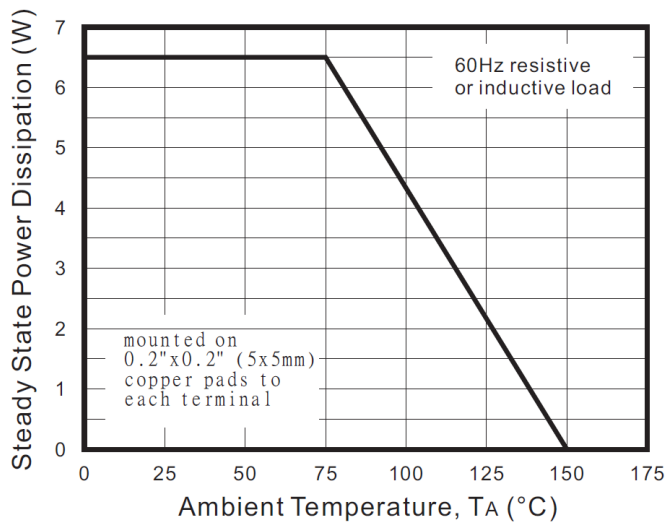


Fig.5 STEADY STATE POWER DERATING CURVE


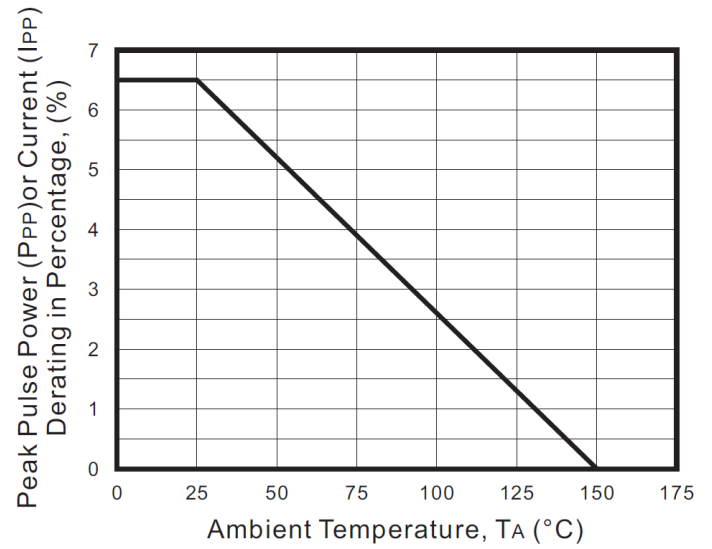



Fig.6 PULSE DERATING CURVE

PACKAGE INFORMATION

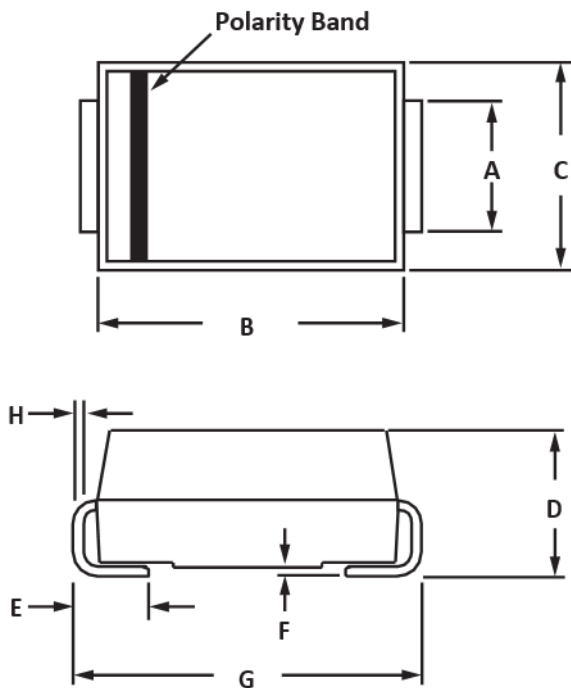


OUTLINE DIMENSIONS				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.75	3.25	0.108	0.128
B	6.60	7.11	0.260	0.280
C	5.59	6.22	0.220	0.245
D	2.06	2.82	0.081	0.111
E	0.78	1.52	0.030	0.060
F	0.051	0.203	0.002	0.008
G	7.75	8.13	0.305	0.320
H	0.152	0.305	0.006	0.012

NOTES
1. Dimensions are exclusive of mold flash and metal burrs.

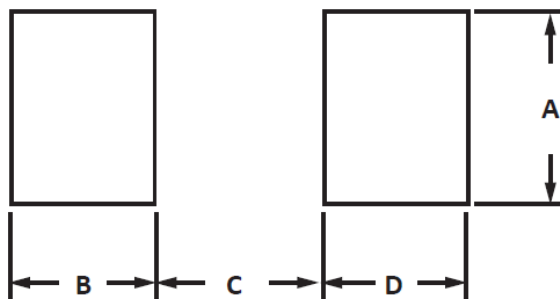

PAD LAYOUT DIMENSIONS				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	3.30	-	0.132	-
B	2.50	-	0.100	-
C	-	4.40	-	0.176
D	2.50	-	0.100	-

PINNING INFORMATION

PIN	SIMPLIFIED OUTLINE	SYMBOL
Uni-Directional Pin1 Cathode Pin2 Anode		
Bi-Directional		



beyond boundaries...

ALPP15SMCJXXA/CA Series

DO-214AB(SMC)

CUSTOMER NOTE:

DISCLAIMER

The product information and the selection guide facilitates the selection of the ALPINESEMI™'s Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review the Data sheet(s) so as to confirm that the Device(s) meets functionality parameters for your application. The information furnished on the Data Sheet and the ALPINESEMI™'s Web Site is believed to be accurate and reliable at the time of preparation of this document. ALPINESEMI™ however, does not assume any inaccuracies that may arise when the components are mounted and removed. Furthermore, ALPINESEMI™ does not assume liability whatsoever, arising out of the application or the use of any of ALPINESEMI™'s product(s). Neither, does it convey any license under its patent rights nor the rights of others. These products are not guaranteed for use in life saving/support appliances or systems. ALPINESEMI™'s customers using these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and ALPINESEMI™ will not be responsible in any way(s) for any damage(s) resulting from such use.

Please check the website www.alpinesemi.com for continues updates and revision of datasheets.

DESIGN CHANGES: ALPINESEMI™ strives for continuous improvement and reserves the right to change the specifications of its products without prior notice. ALPINESEMI™ reserves the right to discontinue product lines without prior notice. Any product selection is a recommendation based on best understanding of such product(s) by our engineers. However, buyers are advised to rely on their own judgment for such selection of the products.

ALPINESEMI™ makes no warranty, representation or guarantee regarding the suitability of its products for any particular applications. Neither does ALPINESEMI™ assume any liability arising out of the applications nor the use of such products. ALPINESEMI™ specifically disclaims all liabilities either consequential or incidental.

All rights of the product and datasheet are reserved to ALPINESEMI™.

All logos and information provided in the datasheets are for reference only. Any registered and/or trademark/logos belonging to respective companies be the property of those companies. ALPINESEMI™ extends the courtesy to them, if any of the information found in its datasheet.

Component Disposal Instructions

1. ALPINESEMI™ Semiconductor Devices are RoHS compliant and hence customers are requested to dispose as per the prevailing Environmental Legislation put forth in their specific country.
2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).



sales@alpinesemi.com
www.alpinesemi.com